

# Like a drive-on rack, at a floor system price.


## Specifications . . . . . Quik-Anchor

- Floor to top of anchor stand . . . . . 10-1/2"
- Floor to top of Pinchweld Clamps (Min) . . . . . 20"
- Floor to top of Pinchweld Clamps (Max) . . . . . 25"
- Overall Length . . . . . 17'
- Runway Length . . . . . 12'2"
- Width inside to inside anchor stands . . . . . 36"
- Width outside to outside anchor stands . . . . . 84"
- Width inside edges of runways . . . . . 16"
- Width Adjustment - each runway . . . . . 7"
- Clearance between floor and vehicle . . . . . 20"
- Weight . . . . . 1267 lbs

- KFS16400 Quik Anchor System
- KFS16500 Long Wheel Base Package
- KY420002 Pivot Riser Ramp Set - Quik Anchor (4)



# QUIK-ANCHOR™

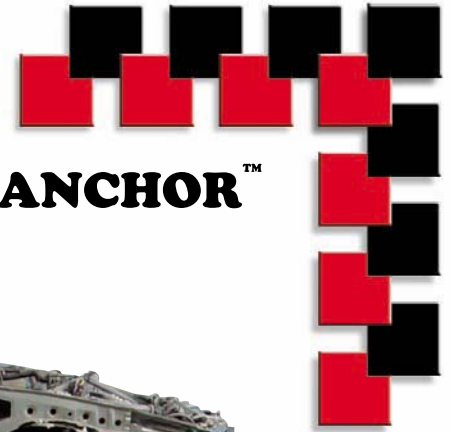

Position a vehicle in seconds with drive-on/drive-off capability.

Portable runways and anchor system are ideal for multibay use.

The front and rear removable runways give you easy access to the suspension area.

Plenty of elbow room with a minimum 20 inch clearance from the floor.

Optional center runways, Quik-Anchor can easily handle long wheelbase vehicles.

Quik-Anchor works with most floor pulling systems.



The open end design allows access to the vehicle underbody.



Quik-Anchor at work with Power Post using the optional height extension.

800-558-4206

